



NAN YA PLASTICS CORPORATION
ELECTRONIC MATERIALS DIVISION.
COPPER CLAD LAMINATE DEPARTMENT

Glass cloth base epoxy resin
flame retardant copper clad laminate

NO. 201. TUNG HWA N. ROAD,
TAIPEI, TAIWAN, ROC

NP-140TL


FEATURES

- Multi-functional epoxy renders the material outstanding heat resistance, better dimensional stability, and through-hole reliability that benefit the performance of high layer count multilayer boards.
- HTE copper foil applied to prevent corner cracking.
- High luminance of epoxy contrast with copper for A.O.I..
- UV solder mask may be applied simultaneously in order to increase yields
- Other properties are similar to FR-4-TL.
- IPC-4101 specification is applicable.

Characteristics	Unit	Conditioning	Typical Values	SPEC	
Volume resistivity	MΩ-cm	C-96/35/90	5.0 x 10 ⁹	10 ⁶ ↑	
Surface resistivity	MΩ	C-96/35/90	5.0 x 10 ⁷	10 ⁴ ↑	
Permittivity 1MHZ	-	C-24/23/50	4.2-4.8	5.4 ↓	
Loss Tangent 1 MHZ	-	D-24/23/50	0.010-0.016	0.035 ↓	
Arc resistance	SEC	D-48/50+D-0.5/23	120 ↑	60 ↑	
Dielectric breakdown	KV	D-48/50	60 ↑	40 ↑	
Moisture absorption	%	C-24/23	<0.78mm	0.18	0.80 ↓
			≥0.78mm	0.15	0.35 ↓
Flammability	-	C-24/23/50+E-24/125	94V0	94V0	
Peel strength 1oz	lb/in	288°C x 10" solder floating	10-14	8 ↑	
Thermal stress	SEC	288 °C solder dipping	90 ↑	10 ↑	
Glass transition temp	°C	DSC	140 ± 5	N/A	
Dimensional stability X-Y axis	%	E 4/105	0.01-0.03	0.05 ↓	
Coefficient of thermal expansion					
	Z-axis before Tg	in/in/°C	TMA	5 x 10 ⁻⁵	N/A
Z-axis after Tg	in/in/°C	TMA	25 x 10 ⁻⁵		

Data shown are nominal values for reference only.

UV TRANSMISSION CURVE OF 0.2mm CCL

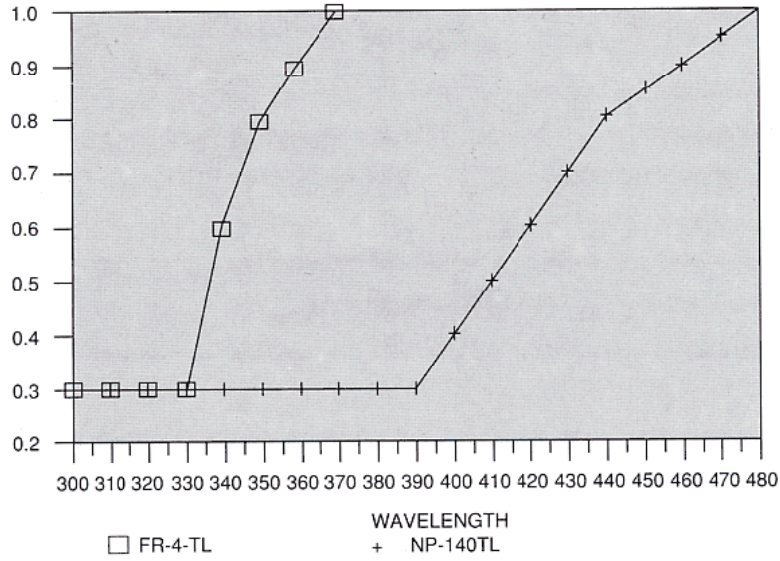

PRODUCT SIZE & THICKNESS

THICKNESS INCH (mm)	COPPER CLADDING OZ (µm)	SIZE		THICKNESS TOLERANCE
		INCH	mm	
0.004 (0.1)	0.5 (17)	48.8 x 36.6	1240 x 0930	CLASS C/M
to	1.0 (35)	48.8 x 40.5	1240 x 1030	
0.047 (1.2)	2.0 (70)	48.8 x 42.5	1240 x 1080	

Keeping the core and prepreg in the same grain direction is crucial to ensure the flatness of multilayer boards.

Grain direction is shown on the certificate of Conformance

CERTIFICATION UL

- UL File No.:E98983(S)

■ CONSTRUCTION:

THICKNESS		CONSTRUCTION
mm	mil	
0.08	3	2112 1 ply
0.10	4	1080 2 plies
0.11	4	2116 1 ply
0.13	5	1080 2 plies
0.13sp	5	2116 1 ply
0.15	6	1506 1 ply
0.16	6	2112 2 ply
0.21	8	7628 1 ply
0.26	10	2116 2 plies
0.30	12	2116 3 plies
0.30sp	12	1506 2 plies
0.35	14	7628 2 plies
0.38	15	7628 2 plies

THICKNESS		CONSTRUCTION
mm	mil	
0.45	18	7628 x 2+1080 x 1
0.46	18	7667 2 plies
0.50	20	7628 3 plies
0.53	21	7628 3 plies
0.60	24	7628 3 plies
0.77	31	7628 4 plies
0.8	32	7628 4 plies
0.9	36	7628 5 plies
1.0	39	7628 5 plies
1.1	44	7628 6 plies
1.2	47	7628 6 plies

*1.2,1.1,1.0,0.9,0.77 mm, THICKNESS INCLUDES CLADDING. ALL OTHERS EXCLUDE CLADDING.



NAN YA PLASTICS CORPORATION
 ELECTRONIC MATERIALS DIVISION.
 COPPER CLAD LAMINATE DEPARTMENT

**Glass cloth base epoxy resin
 flame retardant prepreg**

NO. 201, TUNG HWA N. ROAD,
 TAIPEI, TAIWAN, ROC

NP-140B PREPREG

FEATURES

- Rheology of resin controlled to benefit the lamination of the boards.
- Multi-functional epoxy provides outstanding heat resistance, better dimensional stability and through-hole reliability.
- Higher Tg : 138-142°C
- Other properties are similar to Standard FR-4




PERFORMANCE LIST

Specification : IPC-4101 is applicable

Glass Style	RC%	RF%	GT sec (170°C)	VC%	Scaed Flow Thickness (per ply)	
					mm	mil
7628LF	45 ± 3	20 ± 5	120 ± 20	0.75 ↓	0.180 ± 0.01	7.1 ± 0.4
7628HR	50 ± 3	28 ± 5	130 ± 20	0.75 ↓	0.200 ± 0.01	7.9 ± 0.4
7628MR	47 ± 3	25 ± 5			0.190 ± 0.01	7.5 ± 0.4
7628	43 ± 3	20 ± 5			0.180 ± 0.01	7.1 ± 0.4
1506MR	52 ± 3	30 ± 5			0.160 ± 0.01	6.3 ± 0.4
1506	48 ± 3	25 ± 5			0.150 ± 0.01	6.0 ± 0.4
2116HR	58 ± 3	35 ± 5			0.130 ± 0.01	5.0 ± 0.4
2116MR	54 ± 3	30 ± 5			0.118 ± 0.01	4.6 ± 0.4
2116	50 ± 3	25 ± 5			0.105 ± 0.01	4.1 ± 0.4
2313	55 ± 3	25 ± 5			0.090 ± 0.01	3.5 ± 0.4
2113	56 ± 3	30 ± 5			0.090 ± 0.01	3.5 ± 0.4
2112	60 ± 3	35 ± 5			0.075 ± 0.008	3.0 ± 0.3
1080HR	68 ± 3	45 ± 5			0.071 ± 0.008	2.8 ± 0.3
1080MR	65 ± 3	40 ± 5			0.068 ± 0.008	2.7 ± 0.3
1080	62 ± 3	35 ± 5			0.065 ± 0.008	2.6 ± 0.3
106	68 ± 3	40 ± 5			0.053 ± 0.008	2.1 ± 0.3

Data shown are nominal values for reference only.


Storage Stability

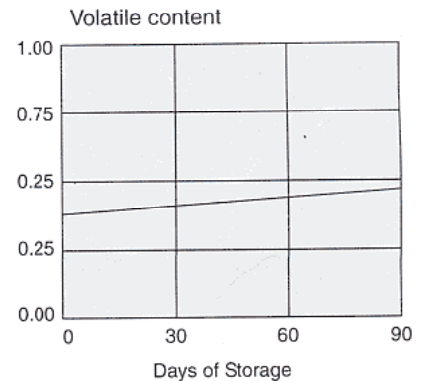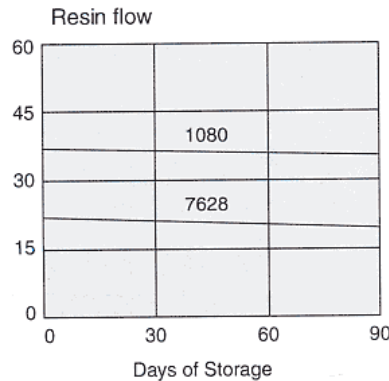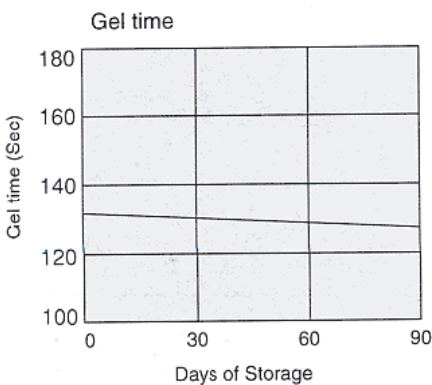


Storage Condition : 20°C, 50% RH for 3 months
: Max 5°C for 6 months

Recommended press cycles:

A:2T2P (2 temperature step/2 pressure step)

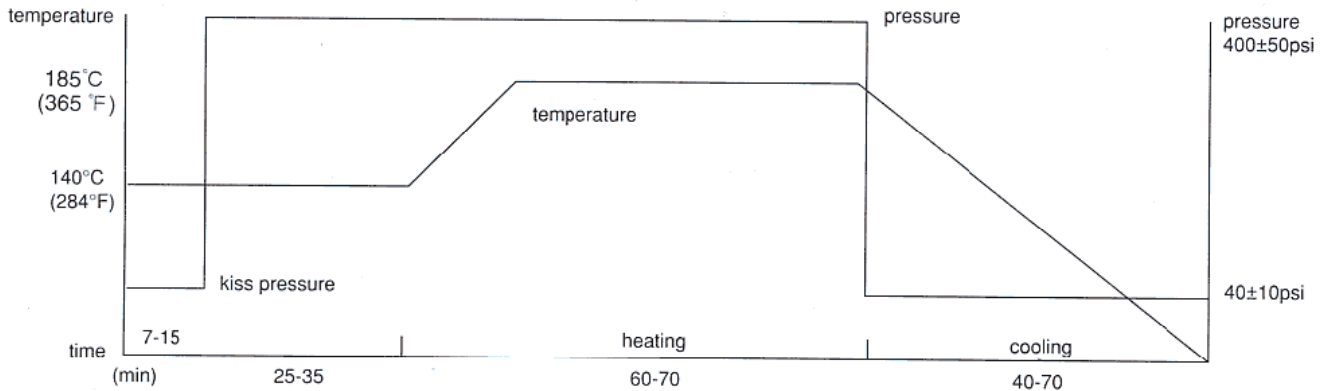

B:1T2P (1 temperature step/2 pressure step)

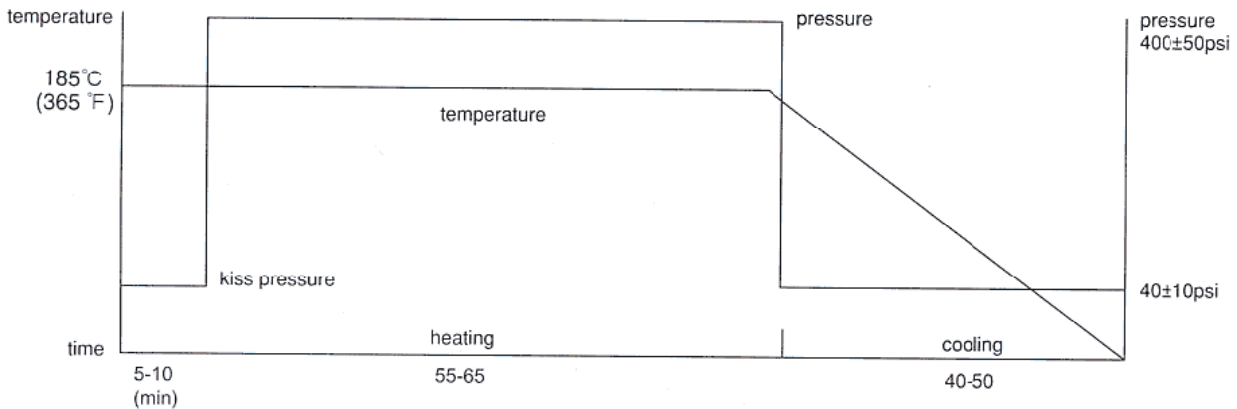

Suggestions:

1. Heating rate of material between 70°C(158°F) and 140°C(284°F)
 1-3°C/min(1.8-5.4°F/min) is acceptable.
 1.5-2.5°C/min (2.7-4.5°F/MIN) would be better.
2. Temperature of material over 170°C(338°F) must be held for at least 40min. to allow epoxy resin to fully cure.
3. The pressure should be kept below 100psi during cooling to ambient temperature.
4. Cooling rate of material should be kept under 2.5°C/min (4.5°F/min) when the temperature of material is over 100°C (212°F), in order to avoid introducing twist.

CERTIFICATION UL

•UL File no. : E98983 (S) •ANSI TYPE:FR-4

UL 746 Recognition

Minimum Material Thickness inch (mm)	Clad cond. Thickness Min. Max. Mils Mils (mic) (mic)	Max. Area Diameter inch (mm)	Sold Lts Temp Time °C sec	UL94 Flame Class	Max. Operating Temp
0.002 (0.051)	0.68 4.08 (17) (102)	2.0 (50.8)	@ @	94V-0	130

@-Preheat 180°C/20min, then 230°C/2min, then 260°C/20sec, then 260 °C/20sec.